


# iDEN/PCS Frequencies (800/900/1900 MHz) Glass Mount Installation Instructions

## 1. Antenna Adapter Required (Sold Separately)


In order to attach your antenna to your cellphone you will need an adapter. The adapter connects the phone to the antenna coax and transfers signal to and from the antenna. If you need help locating an adapter for your phone call Wilson toll-free at 1-866-294-1660.

## 2. Installing the Glass Mount Antenna

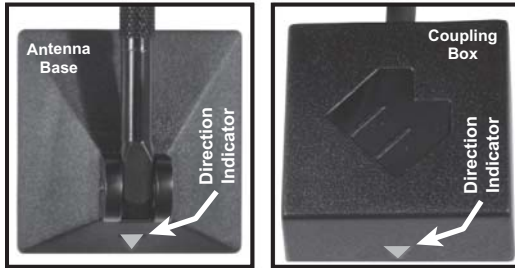

**WARNING: THE ANTENNA BASE AND COUPLING BOX MUST BE PROPERLY ALIGNED OR THE ANTENNA WILL FAIL TO FUNCTION. The arrow indicators on the Antenna Base and Coupling Box must face the same direction when installed.**

**Both Arrows MUST be Facing Same Direction (Up or Down - as Long as They are Together)**

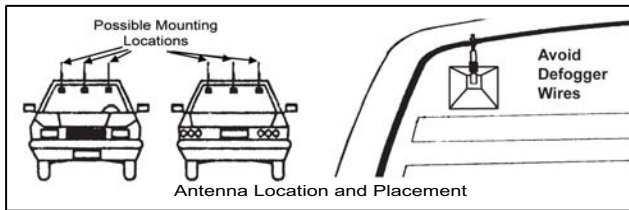

The Glass Mount Antenna may be mounted along the top of the front or rear window. For best performance don't mount on rear window of trucks or SUVs. Check to insure your mounting location won't interfere with windshield wiper operation. Keep the antenna away from the defogger wires. If the antenna must be mounted on the defogger, center it between the defogger wires as much as possible. Clean the exterior window surface with provided alcohol swab. Be sure the same location inside the window is clear of obstacles. Remove the protective paper on the base to expose the adhesive pad and firmly press the antenna into place on the outside of the window. Make sure the whip is screwed securely to the antenna.

**Note: If installing on a home or office window ensure that it is not dual pane glass.**

## 3. Installing the Interior Coupling Box

The Coupling Box is installed on the glass inside the vehicle. Be sure to align it with the antenna base on the outside of the glass. Clean inside glass with the provided alcohol swab where you will mount the box. **The Coupling Box must be installed so it's arrow indicator faces in the same direction as the arrow indicator on the antenna base.** Remove the protective paper to expose the adhesive pad and firmly press the Coupling Box into place. Connect the Coax Cable to your Adapter Cable.

### Item List

- Various examples of Adapters are shown - yours may vary. (Adapter Sold Separately)

**Items for Glass Mount**

- 1 - Glass Mount Antenna
- 2 - Interior Coupling Box and Coax
- 3 - Alcohol Swabs (2)
- 4 - Antenna Adapter (Sold Separately)

## Technical Support

Additional help may be obtained at [tech@wilsonelectronics.com](mailto:tech@wilsonelectronics.com) or by calling Toll-Free 866-294-1660 Monday through Friday between 8:00 AM and 4:30 PM Mountain Time. Wilson Electronics is closed Saturday, Sunday, and Holidays. Check your time zone below for the available hours of assistance.

Pacific Time	Mountain Time	Central Time	Eastern Time
7:00 - 3:30 AM - PM	8:00 - 4:30 AM - PM	9:00 - 5:30 AM - PM	10:00 - 6:30 AM - PM

## 90 Day Warranty

The Wilson Electronics Part# 304201 is warranted for 90 days against defects in workmanship and/or materials and will be repaired or replaced, at the discretion of the manufacturer, to the original purchaser with dated sales receipt. The antenna and a copy of the receipt must be sent to the factory at purchasers expense where it will be repaired or replaced and returned shipping paid. Warranty does not cover damages caused by abuse, misuse, negligence, improper installation, etc. These are considered to be avoidable circumstances and are not covered by warranty. All Wilson warranties are limited to the specific Wilson product only and do not include phone, vehicle or other external product.

# Wilson

**Electronics, Inc.**

**1-866-294-1660**

[wilsonelectronics.com](http://wilsonelectronics.com)

[tech@wilsonelectronics.com](mailto:tech@wilsonelectronics.com)

Wilson Electronics, Inc. is not affiliated with Nextel Corporation or Wilson Antenna.